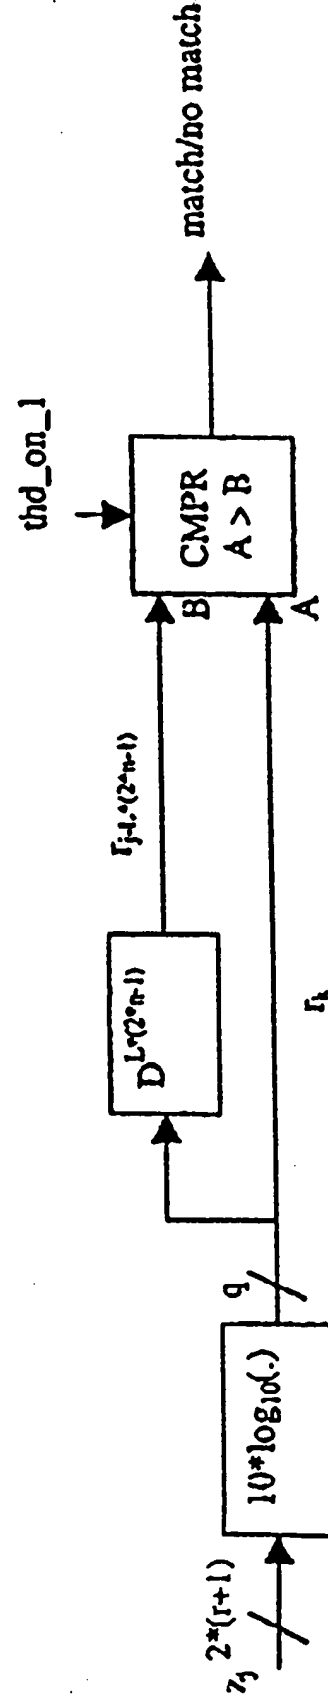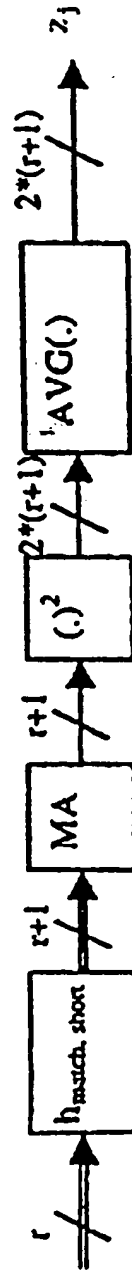| carrier sense state	Output events
init	energy <= 0. Only start-of-preamble events checked.
idle	Only start-of-preamble events checked.
busy	Only end-of-preamble events checked.
transmit	Only start-of-preamble events checked (collision detection).

FIG. 56

FIG. 57